

Volet application

Semi-ajouré



Ajouré



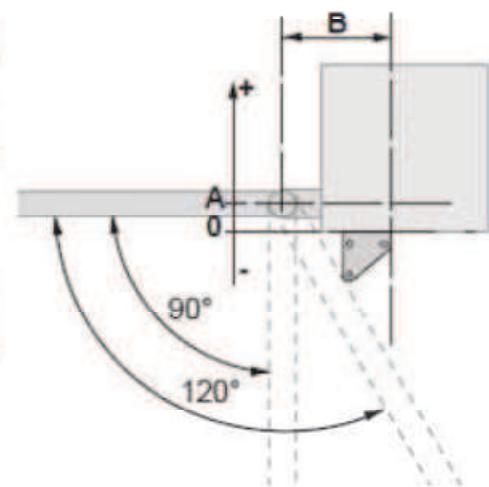
Plein


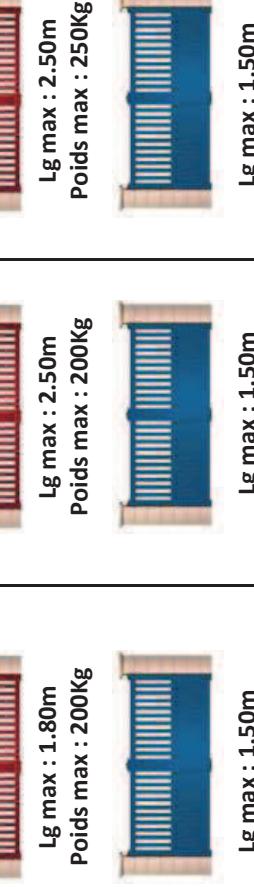


A (mm)	B (mm)	angle max (°)	Position patte
-30	325	110	e
-30	315	115	e
0	310	110	e
0 à 10	305	100	e
10 à 20	305	110	e
20 à 30	295	105	e
30 à 40	295	105	e
40 à 50	285	100	e
50 à 60	275	100	e
60 à 70	300	110	E
70 à 90	290	105	E
90 à 110	280	100	E
110 à 120	270	100	E
120 à 130	260	95	E
130 à 150	250	90	E
150 à 160	240	90	E
160 à 170	230	90	E
170 à 180	220	85	E
180 à 190	215	85	E
190 à 200	205	80	E

Côtes déconseillées pour vantaux > 2 mètres

Sens de montage pilier droit



Caractéristiques Max des produits	SGS 201	SGS 400	SGS 501	EXAVIA 500
	Poids / Lg vantail	200Kg / 1.80m	200Kg / 2.50m	250Kg / 250m
Force du vent	Effets			
$\geq 80 \text{ Km/h}$	On ne marche plus contre le vent			
$< 80 \text{ Km/h}$ $> 40 \text{ Km/h}$	Les branches des arbres s'agitent			
$\leq 40 \text{ Km/h}$	Le sable s'envole		